




2.17

4/3, 4/2 and 3/2 explosion-proof solenoid directional valve

Type G...WE10...L3X

Size (NG) 10
Up to 315 bar
Up to 120 L/min




Contents

Function and configuration	02
Ordering code	03
Spool symbols	03
Technical data	04
Electrical data	04
Characteristic curves	05
Performance limits	05
Unit dimensions	06

Features

- Directly operated type explosion-resistant solenoid operation direction slide valve is used as the standard type
- DIN24 340 A type on the mounting surface ISO 4401 and CETOP-RP 121H
- Wet-type DC explosion protection solenoid
- 90° rotatable explosion protection solenoid
- Pressure-tight chamber needs not to be opened when coil is to be replaced

Function and configuration

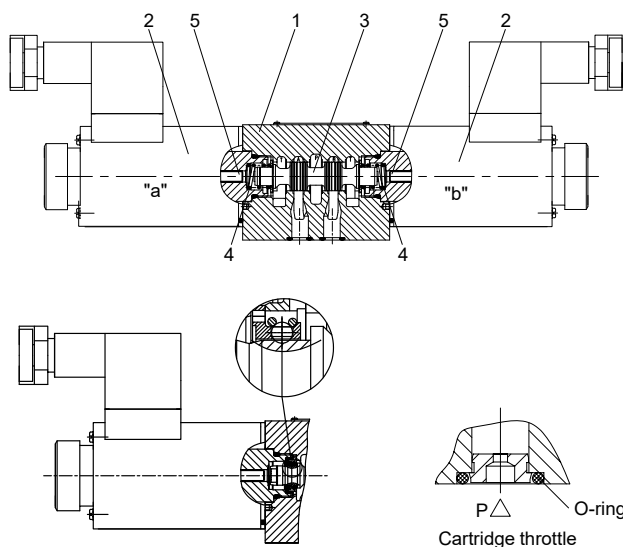

TYPE:G...WE10...L3X/OFB2...

GWE type directional control valve is the directional valve of explosion protection solenoid used to control start, stop and flow direction of oil fluid.

The directional control valves consist of housing (1), one or two solenoids (2), the control spool (3), and one or two return springs (4).

In the de-energised condition the control spool (3) is held in the neutral or initial position by means of return springs (4) (except for pulse spools). The control spool (3) is actuated via wet pin solenoids (2).

To guarantee satisfactory operation care should be taken to ensure that the solenoid pressure chamber is filled with oil.

The control spool(3) is moved to the expected position by solenoid(2) and pushing rod(5), and this gives free-flow from P to A and B to T or P to B and A to T.

When the explosion protection solenoid(2) is powered off, control valve element (3) is pushed to the initial position by reset spring (4).

Type GWE 10 . L3X / O B2...

(Limited to valve element A, C and D)

This type is dual explosion-resistant solenoid 2-position directional valve without a locating mechanism, one of explosion protection solenoids must be powered on in any position, it has not a specific switching position under power-off position.

Type GWE 10 . L3X / OF B2...

(Limited to valve element A, C and D)

This type is dual explosion-resistant solenoid 2-position directional valve with a locator, the valve element can be held at any position and it is unnecessary to continuously electrify the solenoid.

Cartridge throttle

The cartridge throttle is necessary since actual flow may be larger than the performance limits of the valve during switching process.

This cartridge throttle is inserted in the P channel of the directional control valve.

Ordering code

		WE	10		L3X	B2			*
Explosion-resistant type I =G1									Further details in clear text
Explosion-resistant type II =G2									
3 ways(For spool A , B) =3									No code = NBR seals
4 ways =4									V = FKM seals
Directional valve with wet pin solenoids									No code =Without cartridge throttle
Nominal size 10 =10									B08 = Throttle - Φ0.8 mm
Symbols e.g. C, E etc.									B10 = Throttle - Φ1.0 mm
Serial number =L3X									B12 = Throttle - Φ1.2 mm
(L30-L39 have the same interior structures and mounting dimensions)									B15 = Throttle - Φ1.5 mm
Return spr ing =No code									B20 = Throttle - Φ2.0 mm
Without return spr ing = O									B25 = Throttle - Φ2.5 mm
Without return spr ing , and with det ent = OF									B30 = Throttle - Φ3.0 mm
Threaded explosion protection solenoid =B2									Voltage :
									G12 = 12VDC
									G24 = 24VDC
									G36 = 36VDC
									G110 = 110VDC

Note: G1 Explosion protection grade EX d I Mb; G2 Explosion protection grade EX d II C T4 Gb

Spool symbols

Transition position Spool valve symbols Transition position Spool valve symbols

Example:
If solenoid is fixed at position 'a',
the ordering code is...EA.

Notes:
- Notes: -no B9, D9 and Y9.../O and.../OF...type

Technical data


Fixing position			Optional
Environment temperature range °C			-30 to +50 (NBR seal)
			-20 to +50 (FKM seal)
Weight	Single solenoid	kg	5.9
	Double solenoids	kg	8.9
Max.operating pressure	Port P, A, B	bar	315
	Port T	bar	210
	when the operating pressure exceeds the permission value, spool symbol A and B must make the port T for draining		
Max. flow-rate			L/min 120
Flow cross section (switching neutral position)	Version V	mm ²	11(A/B → T); 10.3(P → A/B)
	Version W	mm ²	2.5(A/B → T)
	Version Q	mm ²	5.5(A/B → T)
Fluid			Mineral oil suitable for NBR and FKM seal
			Phosphate ester for FKM seal
Fluid temperature range °C			-30 to +80 (NBR seal)
			-20 to +80 (FKM seal)
Viscosity range mm ² /s			2.8 to 500
Degree of contamination			Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406

Electrical data

Type of voltage			DC
Available voltages			V 12, 24, 36, 110
Voltage tolerance (nominal voltage)			% -15to+10
Power consumption			W 35
Duty cycle			Continuous
Switching time to ISO 6403	ON	ms	45 to 60
	OFF	ms	20 to 30
Switched frequency			times/h To 15000
Protection class according to DIN 40050			IP65
Max. coils tamperature			°C +150

Caution: with electrical connections the protective conductor (PE ≡) must be connected according to the relevant regulations.

Characteristic curves (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

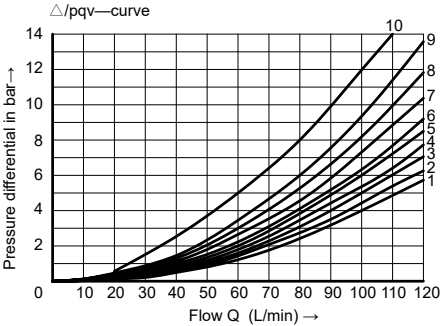

Switching position		P → A	B → A	A → T	P → T
R		-	9	-	-
Switching position	P → A	P → B	B → T	A → T	P → T
F	4	-	-	9	9
P	-	5	8	-	10
G, T			-	-	9
H			-	-	3


Spool symbol	Flow direction			
	P → A	P → B	A → T	B → T
A, B	3	3	-	-
C	3	3	4	5
D, Y	5	5	6	6
E	1	1	4	4
F	2	3	7	4
G	3	3	6	7
H	1	1	6	7
J	1	1	3	3
L	2	2	3	5
M	1	1	4	5
P	4	2	5	7
Q	1	2	1	3
R	3	6	4	-
T	3	3	6	7
U, V	2	2	3	3
W	2	2	4	5

Performance limits (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

The specified switching performance limits are valid for use with two directions of flow (e.g. from P → A and simultaneous return flow from B → T).

Due to the flow forces acting within the valve, the permissible switching performance limits may be significantly lower with only one direction of flow (e.g. from P → A, while port B is blocked)! In such a case, please consult us!

The switching performance limits were determined while the solenoids were at operating temperature, 10% undervoltage and without tank pre-loading.

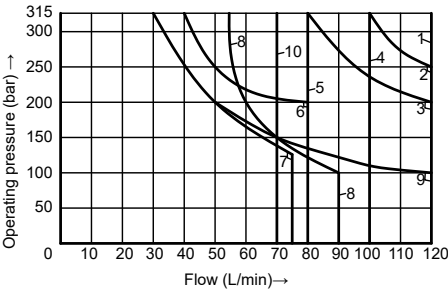


Curve	Spool symbol
1	C, C/O, C/OF
	D, D/O, D/OF
2	Y, M
3	A/O, A/OF
	L, U, J, Q, W
4	H
5 1)	R, L2), U2)
6	G
7	T
8	F, P
9	A, B
10	V

- Notes:
- 1) Return flow (independent of area ratio)
 - 2) Only suitable for neutral position

Unit dimensions

(Dimensions in mm)

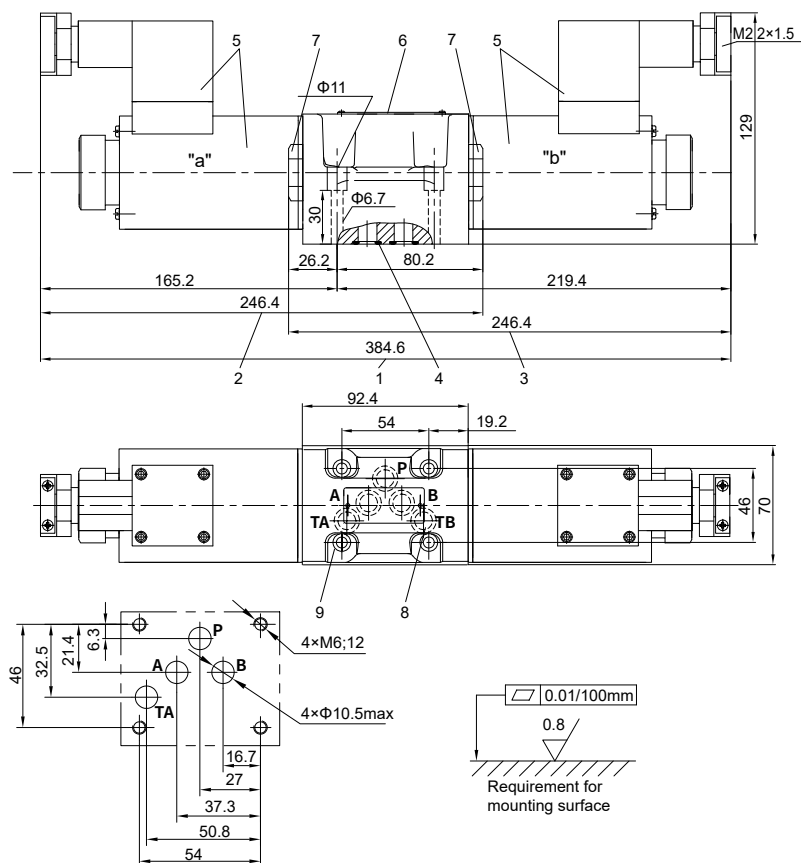

- 1 Dimensions of 3-position valve
- 2 Dimensions of 2-position valve, solenoids at end A
- 3 Dimensions of 2-position valve, solenoids at end B
- 4 R-shaped ring 13×1.6×2 or O-ring 12×2
- 5 Explosion protection solenoid
- 6 Copper nameplate
- 7 End cap used for 1 electrosolenoid valve
- 8 Fix additional port TB on the manifold when necessary.

- 9 Valve fixing screws: M6×40 GB/T 70.1-10.9, Tightening torque, $M_A=15.5\text{Nm}$, must be ordered separately.

It must be ordered separately, if connection plate is needed
Type:

G66/01(G3/8); G66/02(M18×1.5)
 G67/01(G1/2); G67/02(M22×1.5)
 G534/01(G3/4); G534/02(M27×2)