




2.13

4/3, 4/2 and 3/2 directional valves of pilot operated

Type WEH 10, 16, 25 and 32

Sizes 10 ~ 32
Up to 350 bar
Up to 1100L/min



Contents

Function and configuration	02-06
Ordering code	07-08
Symbols	09-11
Technical data	12-16
Characteristic curves	17-18
Performance limit	19-20
Pilot-operated solenoid valve	21
Unit dimensions	22-25

Features

- Valves used to control the start, stop and direction of a fluid flow
- Electro-hydraulic operation (WEH)
- Porting pattern conforms to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H
- Wet pin DC or AC solenoids, optional
- Hand override, optional
- Electrical connections as an individual or central connection
- Spring centered, spring or hydraulic offset.

Function and configurations

Valves of type WEH are directional spool valves with electro-hydraulic operation. They control the start, stop and direction of a flow.

Solenoid valves used for pilot control are with wet AC or DC solenoid available; Main valves apply spring centering and spring reset or hydraulic reset; with or without Switching time adapters; with or without stroke regulators for main valves; back pressure valves may be installed in main valves; throttle may be installed; pressure reducing valves may be installed when working pressure exceeds 250bar.

The valve mainly consists of main valve body(1), main valve spool(2), one(or two)reset spring (3) with one(or two) pilot solenoid valve of solenoid. Main valve spools(2) is held in the neutral or in the initial position either by the springs or by means or pressure. Pilot solenoid valves (4) may select wet-type AC or DC solenoids(5) and pilot solenoid valves are able to control the switching of main valves.


There are four patterns on supply and drain of control oil, see the function diagram.
Following are descriptions of various types of valves:

1. Main valves are 4/3-way directional valve with spring centring of the control spool.

Main valve spool(2) is held in the neutral position by means of two return springs. And two spring chambers(6) are connected with tank through pilot solenoid valves.

When one of the two ends of the main control spool (2) is pressurised with pilot pressure, the spool is moved to the switched position. The required ports in the valve are then opened to flow.

When the pilot pressure is removed, the spring on the opposite side to the pressurised spool area causes the spool to return to its neutral or initial position.

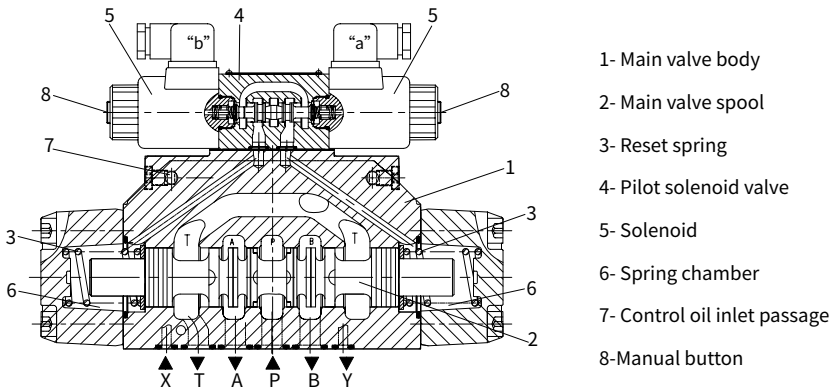

Structure chart of spring centering electro-hydraulic directional valve

Function and configurations

2/4 way directional valves

(this kind of valve has four different structures and Types)

1. Type WEH.../...

This kind of pilot valve and main valve have a reset spring each, resetting by spring force.

2. Type WEH...H.../...

This kind of valve has a reset spring, making pilot valve spool stay in initial position. Main valve spools change directions under effect of pressure oil.

3. Type WEH...H.../O...

This kind of valve has two solenoids. There are no reset springs in pilot valves and main valves, thus using solenoids and pressure oil to make pilot valves and main valve spools change directions. Therefore, at least one solenoid shall be under working state.


4. Type WEH...H.../OF...

This kind of valve has two solenoids and locators which makes pilot valve spools stay in working position (impulse valves). Main valve spools have no locating devices, moving downward to corresponding working positions under effect of pressure oil.

Structure 2, 3 and 4 aforesaid are hydraulic reset. Main valve spools can stay in the working position only under the effect of pressure oil.

Throttle insert:

The use of a throttle insert is required if the pilot oil supply in the P channel of the pilot valve is to be limited. This throttle is inserted in the P channel of the pilot valve.



Structure chart of plug-in dampers

Function and configurations

Pilot oil supply:

1. Type WEH10

(1) Conversion between internal supply and external supply:

P channel on the top of main valve bodies with M6 bolt(2) is external supply and with M6 bolt (2) dismantled is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug screws(1) and installing M6 bolt(2) is external drain; dismantling M6 bolt(2) is internal drain.


2. Type WEH16

(1) Conversion between internal supply and external supply:


Dismounting plug screw(10) form P channel on the sidesurface of main valves and installing M6 bolt(9) is internal supply. Dismounting M6 plug bolt(9) is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug screw(10) form T hole on the top of main valves and installing M6 plug bolt(9) is internal drain. Dismounting M6 bolt(9) is external drain.

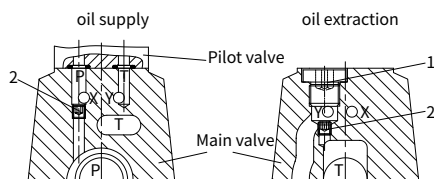

Structure chart of WEH10 model supply and discharge

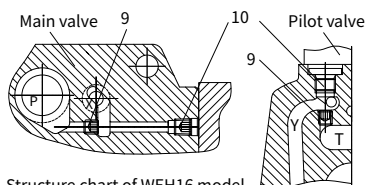

Structure chart of WEH16 model supply and discharge

3. Type WEH25

(1) Conversion between internal supply and external supply:

P channel on the top of main valve bodies with M6 bolt(6) is external supply and with M6 bolt (6) dismantled is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug bolt(6) form T hole on the top of main valves and installing M6 plug bolt(9) is internal drain. Dismounting M6 bolt(9) is external drain.


4. Type WEH32

(1) Conversion between internal supply and external supply:


Dismounting plug screw(9) form P hole on the undersurface of main valves and installing M6 bolt(9) is internal supply. Dismounting M6 plug bolt(9) is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug screw(9) form T hole on the top of main valves and installing M6 plug bolt(9) is internal drain. Dismounting M6 bolt(9) is external drain.



Structure chart of WEH25 model supply and discharge



Structure chart of WEH32 model supply and discharge

Attention:

X port on base plates must be blocked when internal supply occurs and Y port on base plates must be blocked when internal drain occurs.

Function and configurations

Switching time adjustment:

In order to influence the switching time of the main valve a double throttle check valve has to be fitted between pilot valves and main valves to control oil supply from pilot valves into main valve spools, thus adjusting the switching time of main valves.

Regulating bolt rotation clockwise, the time for switching of main valves is long, otherwise the time is short.

The throttle check valve has two kinds: meter-in throttling and meter-out throttling. If there is a need of changing meter-in throttling into meter-out throttling, just install the valve after rotating 180° around the longitudinal axis again and then install pilot valves.

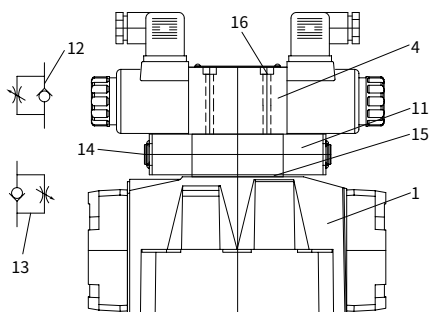


Figure of WEH.....S or S2 type commutating time regulator for valve installation

- 1- Main valve
- 4- Pilot valve
- 11- Switching time regulator(Z2FS6)
- 12- Meter-out throttling
- 13- Meter-in throttling
- 14- Adjustable bolt
- 15- Seal ring support plate
- 16- Set screw M5×L GB/T70.1-10.9 grade, the length of L is determined by height stacked, tightening torque 8.9 Nm.


Pressure reducing valves:

The pressure reducing valve (8) must be used if the pilot pressure is higher than 250 bar (for type 4WEH 22 ...: 210 bar). Pressure reducing ratio of constant-ratio pressure reducing valves(D1)1:0.66.

Pressure reducing pressure of constant-ratio pressure reducing valves shall not exceed 40bar.

Minimum control pressure of technical specifications shall improve 1/0.66=1.515 after installing bottom plate pressure reducing valves.

Constant-ratio pressure reducing valves shall not be used when controlling internal oil drain and using back pressure valves(P0.45) with control pressure decreased to 3bar.

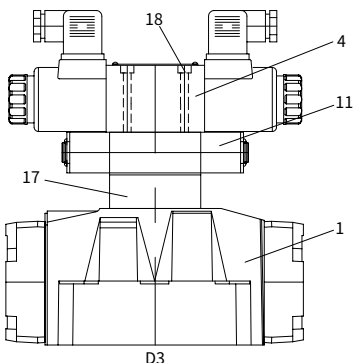


Structure chart of WEH.../...S...D1 or D3 type valve with pressure reducing valves

- 1- Main valve
- 4- Pilot valve
- 11- Switching time regulator
- 17- Pressure reducing valve
- 18- Bolt M5×L GB/T70.1-10.9

Function and configurations


Back pressure valve:

Valves controlling oil inner supply with unloading passages, such as C, Z, G, H, P, S, T and V, In valves with zero pressure circulation and internal pilot oil supply,a back pressure valve (9) must be installed in the P-channel of the main valve to build up the minimun pilot pressure. The pressure differential of the back pressure valve must be added to the pressure differential of the main valve (see characteristic curves) in order to determine the acutal value. The opening pressure of this valve is approx. 4.5 bar. NG10 valves do not have back pressure valves.




WEH16(32).../.../...PO.45 type
Structure chart of back pressure
valve of electro-hydraulic directional valve


- 19- Back pressure valve
- 20- Main valve
- 21- Control oil chamber(X)
- 22- Connecting plate



Pressure loss curve of **WEH16** type electro-hydraulic directional valves passing through back pressure valves (Test condition:use HLP46, $\vartheta_{oil}=40^{\circ}C \pm 5^{\circ}C$)

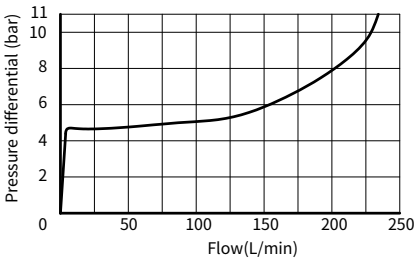

Pressure loss curve of **WEH25** type electro-hydraulic directional valves passing through back pressure valves (Test condition:use HLP46, $\vartheta_{oil}=40^{\circ}C \pm 5^{\circ}C$)

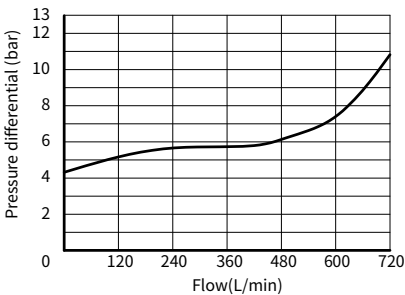

Pressure loss curve of **WEH32** type electro-hydraulic directional valves passing through back pressure valves (Test condition:use HLP46, $\vartheta_{oil}=40^{\circ}C \pm 5^{\circ}C$)

Ordering code

	WEH10	- L4X /																	*
Working pressure 350bar = no code																			Further details in clear text
3 ways = 3 (For spool A and B)																			No code = NBR seals V = FKM seals
4 ways = 4																			
Spring centering or reset = No code Hydraulic reset = H (only 2-position valve A, B, C, D, K, Z, Y)																			No code= without pressure reducing valves D1= with constant-ratio pressure reducing valves (pressure reducing 1:0.66) D3= with constant-value pressure reducing valves
See function symbols																			
Series L40 to L49 = L4X (L40 to L49: unchanged installation and connection dimensions)																			No code = without cartridge dampers B08= with dampers 0.8mm B10= 1.0mm B12= 1.2mm B15= 1.5mm
When pilot valves use 2-position valves of 2 solenoid and main valves are 2-position valves of hydraulic reset, "H" shall be indicated clearly, at this time, when pilot valves Without spring return = O Without spring return with detent = OF (O and OF do not apply to B, Y)																			Z4 = square plugs (not applicable for the integer) Z5L = square plugs with lamps K4 = DIN4365 sockets without plugs K7 = Deutsch connector assembly, without plugs DL = Junction boxes with lead wires and lamps (M22 × 1.5 interface)
High-performance solenoid pilot valve = 6E Low power solenoid pilot valve (only DC24V) = 6H																			
DC24V = G24 The integer 110V = W110R 220V = W220R																			
Other voltage see electric part																			
With manual override buttons = N																			No code= Without switching time adjustment S = Switching time adjustment as meter-in control S2 = Switching time adjustment as meter-out control
Control oil supply and drain Type: external supply external drain = No code internal supply external drain = E internal supply and internal drain = ET (Not available for function C, Z, F, G, H, P, T, V) external supply internal drain = T																			

Note:

- For function of WEH10 such as C, Z, F, G, H, P, T, V, etc, if applying control oil internal supp, please try to use external add enough back pressure on return port T (port Y shall not have back pressure) to ensure valves can reverse properly.
- Pressure reducing valves shall be applied when control pressure exceeds 250bar.

Ordering code

	WEH		-L7X/					/				*
Working pressure 350bar =No code												Further details in clear text
3 ways = 3 (For spool A and B)												No code = NBR seals V = FKM seals
4 ways = 4												
Sizes: 16 = 16 25 = 25 32 = 32												No code= without pressure reducing valves D1= with constant-ratio pressure reducing valves (pressure reducing 1:0.66) D3= with constant-value pressure reducing valves
Main valve spring reset or centering=No code Main valve hydraulic reset =H												No code= without back pressure valves P0.45=with back pressure valves: cracking pressure 4.5bar P0.70=with back pressure valves: cracking pressure 7bar
See slide valve function marks												No code= without cartridge dampers B08= with throttle 0.8mm B10= with throttle 1.0mm B12= with throttle 1.2mm B15= with throttle 1.5mm
Series L70 to L79 = L7X (L70 to L79:unchanged installation and connection dimensions)												Z4 = square plugs (not applicable for the integer) Z5L= square plugs with lamps K7 = Deutsch connector assembly, without plugs DL = Junction boxes with lead wires and lamps (M22×1.5 interface)
When pilot valves use 2-position valves of 2 solenoid, main valves are hydraulic reset, "H" must be indicated clearly before Type code at this time when pilot valves: Without reset spring = O Without reset spring,with detent = OF (O and OF not applicable to B and Y function)												No code = Without switching time adjustment S = Switching time adjustment as meter-in control S2 = Switching time adjustment as meter-out control
High-performance solenoid pilot valve = 6E Low power solenoid pilot valve (only DC24V) = 6H												
DC24V = G24 The integer110V = W110R 220V = W220R Other voltage see electric part												
With manual override buttons = N												
Control oil supply and drain Type: external supply external drain = No code internal supply and drain = ET internal supply external drain = E external supply internal drain = T												


Note:

1. For function of WEH16-32 such as C, Z, F, G, H, P, T, V, etc, if applying control oil internal supp, please try to use external add enough back pressure on return port T(port Y shall not have back pressure) to ensure valves can reverse properly.
2. Pressure reducing valves shall be applied when control pressure exceeds 250bar.

Symbols


Valves with spring centred

Detailed and simplified symbols for 3-position valves

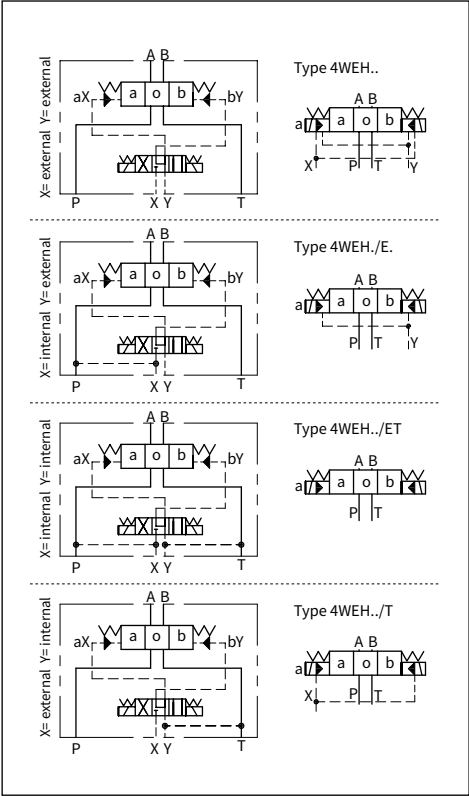

Valves with spring offset

(At position A or B of 2-position valve derived from 3-position)

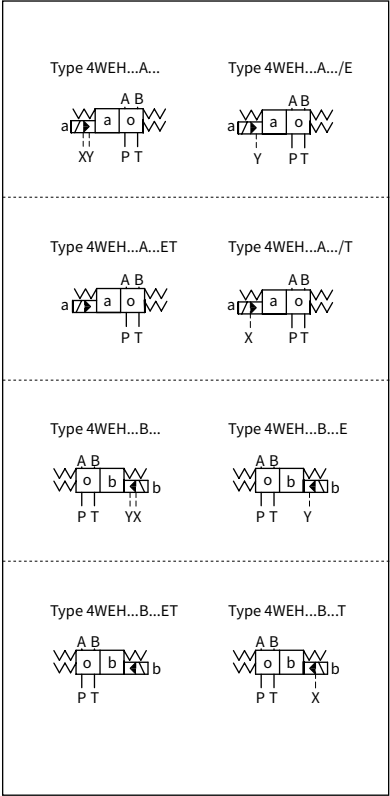

Symbols

Spools of 3-position valves

3-position valve


3-position valve type	Symbol	Crossover Symbol
4WEH...E.../... E		
4WEH...F.../... F		
4WEH...G.../... G		
4WEH...H.../... H		
4WEH...J.../... J		
4WEH...L.../... L		
4WEH...M.../... M		
4WEH...P.../... P		
4WEH...Q.../... Q		
4WEH...R.../... R		
4WEH...S.../... S		
4WEH...T.../... T		
4WEH...U.../... U		
4WEH...V.../... V		
4WEH...W.../... W		
4WEH...M1.../... M1		
4WEH...M2.../... M2		
4WEH...J2.../... J2		

2-positon derivative from 3-position

2-position valve type	Symbol (solenoid at A end)	2-position valve type	Symbol (solenoid at B end)
4WEH...EA.../... EA		4WEH...EB.../... EB	
4WEH...FA.../... FA		4WEH...FB.../... FB	
4WEH...GA.../... GA		4WEH...GB.../... GB	
4WEH...HA.../... HA		4WEH...HB.../... HB	
4WEH...JA.../... JA		4WEH...JB.../... JB	
4WEH...LA.../... LA		4WEH...LB.../... LB	
4WEH...MA.../... MA		4WEH...MB.../... MB	
4WEH...PA.../... PA		4WEH...PB.../... PB	
4WEH...QA.../... QA		4WEH...QB.../... QB	
4WEH...RA.../... RA		4WEH...RB.../... RB	
4WEH...SA.../... SA		4WEH...SB.../... SB	
4WEH...TA.../... TA		4WEH...TB.../... TB	
4WEH...UA.../... UA		4WEH...UB.../... UB	
4WEH...VA.../... VA		4WEH...VB.../... VB	
4WEH...WA.../... WA		4WEH...WB.../... WB	
4WEH...M1A.../... M1A		4WEH...M1B.../... M1B	
4WEH...M2A.../... M2A		4WEH...M2B.../... M2B	
4WEH...J2A.../... J2A		4WEH...J2B.../... J2B	

Symbols

Detailed and simplified symbols for 2-position valves

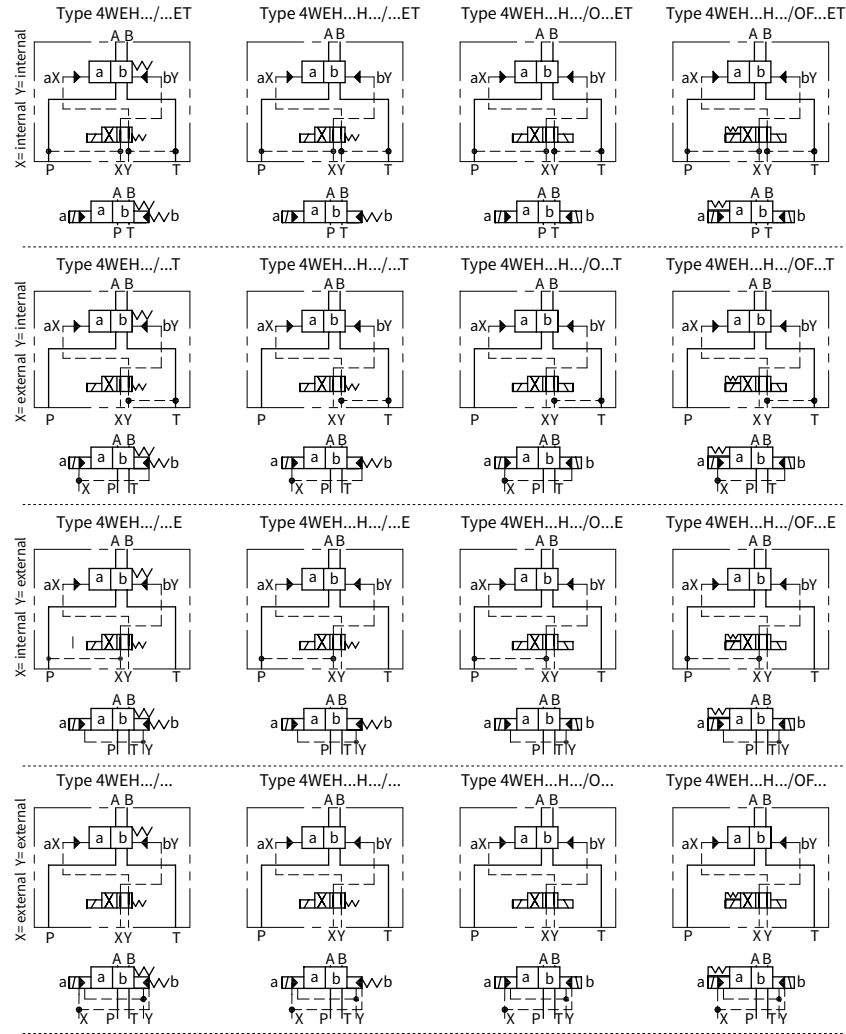

Spools of 2-position valves

Spools:	A	C	D,DE	K	Z	B	Y,YE
Spool symbols:							
Transition symbols:							

Technical details

1. Hydraulic section

1). WEH10 Type electro-hydraulic directional valve

Maximum working pressure:		bar	Type WEH10							
P, A, B			350							
Port T	With external pilot oil drain	bar	315							
	With internal pilot oil drain	bar	DC210, AC160							
Port Y	With external pilot oil drain	bar	DC210, AC160							
Min. control pressure	With external pilot oil supply	bar	3-position valve 10							
	With internal pilot oil supply (not apply to C, Z, F, G, H, P, T, V)		Spring-return 2-position valve 10							
	With internal pilot oil supply (apply to C, Z, F, G, H, P, T, V)	bar	Hydraulic-return 2-position valve 7							
			6.5							
Max. control pressure		bar	250							
Hydraulic fluid			Mineral oil, phosphate oil							
Temperature range of Hydraulic fluid		°C	-30 to+80 (NBR seals)							
			-20 to+80 (FKM seals)							
Viscosity range		mm ³ /s	2.8 to 500							
Switching pilot oil volume		cm ³	3-position valve 2.04							
			2-position valve 4.08							
Switching times (= Valve switching time from the neutral position to the switched position) (AC and DC)										
Control pressure		bar	70		140		210		250	
			AC	DC	AC	DC	AC	DC	AC	DC
- 3-position valve		ms	30	65	25	60	20	55	15	50
- 2-position valve		ms	35	80	30	75	25	70	20	65
Switching times (= Valve switching time from the neutral position to the switched position)										
- 3-position valve		ms	30							
- 2-position valve		ms	35	40	30	35	25	30	20	25
Flow of shortest switching time		L/min	About 35							
Installation position			HC, HD, HK, HZ and HY of hydraulic return shall installed horizontally. The rest are arbitrary							
Weight	Single solenoid valve	kg	6.7							
	Double solenoid valve		7.1							
	Switching time regulator		1.0							
	Reducing valve		0.5							

Technical details

1. Hydraulic section

2). WEH16 Type electro-hydraulic directional valve

Maximum working pressure:		bar	Type WEH16						
P, A, B			350						
Port T	With external pilot oil drain	bar	250						
	With internal pilot oil drain	bar	DC210, AC160						
Port Y	With external pilot oil drain	bar	DC210, AC160						
Min. control pressure	With external pilot oil supply	bar	3-position valve 14						
	With internal pilot oil supply		Spring-return 2-position valve 14						
			Hydraulic-return 2-position valve 14						
	With internal pilot oil supply		When applying prepressing or the flow is large correspondingly ,enginery of spool valve is 4.5 as C, Z, F, G, H, P, S, T and V						
Max. control pressure		bar	250						
Hydraulic fluid			Mineral oil, phosphate oil						
Temperature range of Hydraulic fluid	°C		-30 to+80 (NBR seals)						
			-20 to+80 (FKM seals)						
Viscosity range		mm ² /s	2.8 to 500						
Switching pilot oil volume		cm ³	Spring-centering 3-position valve 5.72						
		cm ³	2-position valve 11.45						
* Switching times (= Valve switching time from the neutral position to the switched position) (AC and DC)									
Control pressure	bar	50		150		250			
		AC	DC	AC	DC	AC	DC	AC	DC
- Spring-centering 3-position valve	ms	35	65	30	60	30	58		
- 2-position valve	ms	45	65	35	55	30	50		
*Switching times (= Valve switching time from the neutral position to the switched position)									
- Spring-centering 3-position valve	ms	30							
- 2-position valve	ms	45	45	35	35	30	30		
Installation position		C, D, K, Z, Y Type hydraulic-return valves are installed horizontally, the rest can be installed arbitrarily							
Flow of shortest switching time		L/min	About 35						
Weight of the valve		kg	About 9.5						

*Switching time refers to time from drawing of solenoidof pilot valve to full opening of main valve.

Technical details

1. Hydraulic section

3). WEH25 Type electro-hydraulic directional valve

Maximum working pressure: P, A, B		bar	Type WEH25 350							
Port T	With external pilot oil drain	bar	250							
	With internal pilot oil drain	bar	DC210, AC160							
Port Y	With external pilot oil drain	bar	DC210, AC160							
Min. control pressure	With external pilot oil supply	bar	Spring-centering 3-position valve 13							
	With internal pilot oil supply	bar	Spring-return 2-position valve 13							
		bar	Hydraulic-return 2-position valve 8							
		With internal pilot oil supply	bar	When applying prepressing or the flow is large correspondingly ,enginery of spool valve is 4.5 as C, Z, F, G, H, P, S, T and V						
Max. control pressure		bar	250							
Hydraulic fluid			Mineral oil, phosphate oil							
Temperature range of Hydraulic fluid		°C	-30 to+80 (NBR seals)							
			-20 to+80 (FKM seals)							
Viscosity range		mm ² /s	2.8 to 500							
Switching pilot oil volume		cm ³	Spring-centering 3-position valve 14.2							
		cm ³	2-position valve 28.4							
* Switching times (= Valve switching time from the neutral position to the switched position) (AC and DC)										
Control pressure		bar	50		140		210		250	
			AC	DC	AC	DC	AC	DC	AC	DC
- Spring-centering 3-position valve		ms	50	85	40	75	35	70	30	65
- Spring-return 2-position valve		ms	120	160	100	130	85	120	70	105
Switching times (= Valve switching time from the neutral position to the switched position)										
- Spring-centering 3-position valve		ms	40							
- Spring-return 2-position valve		ms	120	125	95	100	85	90	75	80
Installation position			C, D, K, Z, Y Type hydraulic-return valves are installed horizontally, the rest can be installed arbitrarily							
Flow of shortest switching time		L/min	About 35							
Weight of the valve		Kg	About 18							

*Switching time refers to time from drawing of solenoidof pilot valve to full opening of main valve.

Technical details

1. Hydraulic section

4). WEH32 Type electro-hydraulic directional valve

Maximum working pressure:			Type WEH32					
P, A, B			350					
Port T	With external pilot oil drain	bar	250					
	With internal pilot oil drain	bar	DC210, AC160					
Port Y	With external pilot oil drain	bar	DC210, AC160					
Min. control pressure	With external pilot oil supply With internal pilot oil supply	bar	3-position valve 8.5					
			Spring-return 2-position valve 10					
			Hydraulic-return 2-position valve 5					
	With internal pilot oil supply	bar	When applying prepressing or the flow is large correspondingly ,enginery of spool valve is 4.5 as C, Z, F, G, H, P, S, T and V					
Max. control pressure		bar	250					
Hydraulic fluid			Mineral oil, phosphate oil					
Temperature range of Hydraulic fluid		°C	-30 to+80 (NBR seals)					
			-20 to+80 (FKM seals)					
Viscosity range		mm ² /s	2.8 to 500					
Switching pilot oil volume		cm ³	Spring-centering 3-position valve	29.4				
		cm ³	2-position valve	58.8				
* Switching times (= Valve switching time from the neutral position to the switched position) (AC and DC)								
Control pressure	bar	50		150		250		
		AC	DC	AC	DC	AC	DC	
- Spring-centering 3-position valve		ms	65	80	50	90	35	105
- Spring-return 2-position valve		ms	100	130	75	100	60	115
Switching times (= Valve switching time from the neutral position to the switched position)								
- Spring-centering 3-position valve		ms	(直流: 50, 交流: 60)					
- 2-position valve		ms	115	90	35	70	65	65
Installation position			C, D, K, Z, Y Type hydraulic-return valves are installed horizontally, the rest can be installed arbitrarily					
Flow of shortest switching time		L/min	About 50					
Weight of the valve		kg	About 36					

*Switching time refers to time from drawing of solenoidof pilot valve to full opening of main valve.

02

Technical details


2. Electrical data

Type of voltage	Direct voltage		Alternating voltage
Voltage (allowable fluctuation of ±10%)	12, 24, 28 ¹⁾ , 48, 96 110, 205, 220		110, 127, 220
Power(W)	High-performance solenoid valve 30	Low-powered solenoid valve 16	
Holding power (VA)			50
Starting power (VA)			220
Operating state	Continuous		
Temperature range of environment (°C)	~ +50		
Temperature range of coil (°C)	~ +150		
Protection class to DIN40050	IP65		

1) Usually used for engineering machinery.
for other voltage, please consult the company.

Characteristic curves (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)


Type WEH 10...

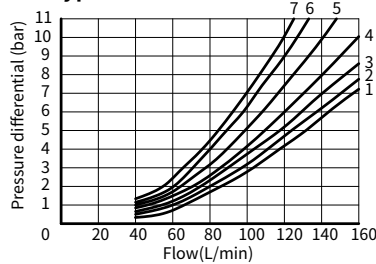

Pressure loss curve graph of **WEH10** Type electro-hydraulic directional control valve

Enginery symbol	Switching position				Enginery symbol	Neutral position		
	P → A	P → B	A → T	B → T		A → T	B → T	P → T
E, Y, D	2	2	4	5				
F	1	4	1	4	F	3	-	6
G, T	4	2	2	6	G, T	-	-	7
H, C	4	4	1	4	H	1	3	5
J, K	1	2	1	3				
L	2	3	1	4	L	3	-	-
M	4	4	3	4				
P	4	1	3	4	P	-	7	5
Q, V, W, Z	2	2	3	5				
R	2	2	3	-				
U	3	3	3	4	U	-	4	-


Type WEH 16...

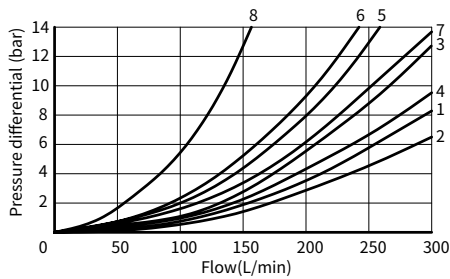

Pressure loss curve graph of **WEH16** Type electro-hydraulic directional control valve

Symbol	Switching position				
	P → A	P → B	A → T	B → T	P → T
E, Y, D	1	1	1	3	-
F	2	2	3	3	-
G, T	5	1	3	7	6
H, C, Q, V, Z	2	2	3	3	-
J, K, L	1	1	3	3	-
M, W	2	2	4	3	-
R	2	2	4	-	-
U	1	1	4	7	-
S	4	4	4	-	8

Type WEH 25...

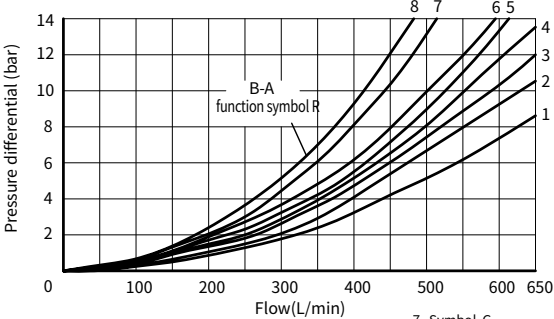




Pressure loss curve graph of **WEH25** Type electro-hydraulic directional control valve

7 Symbol G
Neutral position P-T
8 Symbol T
Neutral position P-T

Symbol	Switching position			
	P → A	P → B	A → T	B → T
E	1	1	1	3
F	1	4	3	3
G	3	1	2	4
H	4	4	3	4
J, Q	2	2	3	5
L	2	2	3	3
M	4	4	1	4
P	4	1	1	5
R	2	1	1	-
U	4	1	1	6
V	2	4	3	6
W	1	1	1	3
T	3	1	2	4

Characteristic curves (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

Type WEH 32...

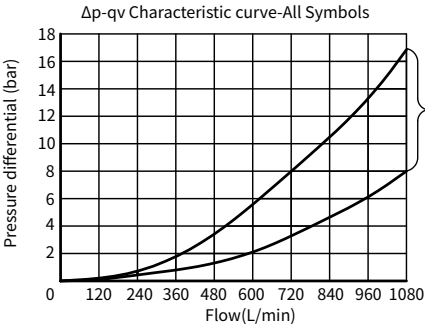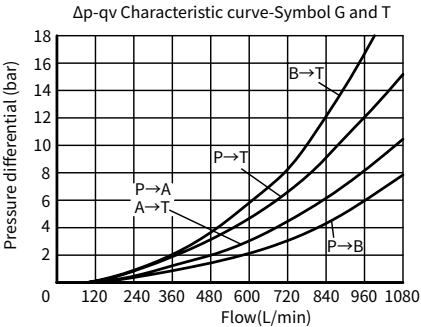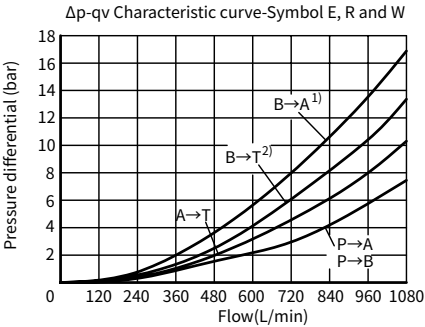

Characteristic curve of other engines

- 1) Only apply to Symbol R
- 2) Not apply to Symbol R

Pressure loss curve graph of **WEH32** Type
electro-hydraulic directional control valve

When valve is at the middle position,open area of all flow directions

Size	Enginery	Open area (mm ²)			
		P → A	P → B	A → T	B → T
WEH10	Q	-	-	13	13
	V	13	13	13	13
	W	-	-	2.4	2.4
WEH16	Q	-	-	32	32
	V	32	32	32	32
	W	-	-	6	6
WEH25	Q	-	-	83	83
	V	83	83	83	83
	W	-	-	14	14
WEH32	Q	-	-	78	78
	V	73	73	84	84
	W	-	-	20	20

Performance limit

The switching function of valves depends on filtration due to adhesive effects. To achieve the specified permissible flow values, we recommend full-flow filtration with 25 µm. The flow forces acting within the valves also have an influence on the flow performance. With 4-way directional valves, the specified flow data are therefore valid for normal applications with 2 directions of flow (e.g. from P to A and simultaneous return flow from B to T) (see table).
If the fluid flows in only one direction, the permissible flow may be significantly lower in critical cases (e.g. use of a 4-way directional as 3-way directional valve with port A or B blocked).

Type: WEH10 electro-hydraulic directional control valve

3-position valve, spring centering					2-position valve, main valve without spring				
Flow(L/min)		Pressure stage(bar)			Flow(L/min)		Pressure stage(bar)		
Symbol		200	250	315	Symbol		200	250	315
E, J, L, M, Q, U, W, R, V		160			HC HD HK HZ HY		160		
H		160	150	120	HC.../O HD.../O HK.../O HZ.../O		160		
G, T		160		140	HC.../OF... HD.../OF... HK.../OF... HZ.../OF...		160		
F, P		160	140	120					
2-position valve whose main valve has a returning spring									
C, D, K, Z, Y		160							

Type: WEH16 electro-hydraulic directional control valve

Spring-centering 3-position valve						2-position valve					
Flow(L/min)	Pressure stage(bar)					Flow(L/min)	Pressure stage(bar)				
Symbol	70	140	210	280	350	Symbol	70	140	210	280	350
E, H, J, L, M, Q, U, W, R	300	300	300	300	300	C	300	300	300	300	300
F, P	300	300	270	260	250	D, Y	300	270	260	250	230
G, T	300	250	180	170	150	K	300	250	240	230	210
S	300	250	240	210	190	Z	300	260	190	180	160
V	300	300	300	250	220	Hydraulic-return 2-position valve					
	300	250	210	200	180	HC, HD, HK, HZ, HY	300	300	300	300	300
						When control oil is supplied internally and pressure valve is equipped, the flow of spool valve's enginery of H, F, P, G, T, S, V, C and Z Types reaches 160L/min.					

Performance limit

Type: WEH25 electro-hydraulic directional control valve

3-position valve of spring centering						2-position valve					
Flow(L/min)	Pressure stage(bar)					Flow(L/min)	Pressure stage(bar)				
Symbol	70	140	210	280	350	Symbol	70	140	210	280	350
E, L, M	650	650	650	650	650	G, D, K, Z, Y	650	650	650	650	650
U, W, Q						Hydraulic-return 2-position valve (main valve without spring)					
G, T	400	400	400	400	400	HC HD HK	650	650	650	650	650
F	650	550	430	330	300	HZ HY					
H	650	650	550	400	360	HC.../O					
J	650	650	650	600	520	HD.../O					
P	650	550	430	330	300	HK.../O	650	650	650	650	650
V	650	550	400	350	310	HZ.../O					
R	650	650	650	650	580	HC.../OF...					
G, T	400	400	400	400	400	HD.../OF...					
						HK.../OF...	650	650	650	650	650
						HZ.../OF...					
						When control oil is supplied internally and pressure valve is equipped, the flow of spool valve's enginery of G, Z, V, F, H, P, T Types reaches 180L/min.					

Type: WEH32 electro-hydraulic directional control valve

3-position valve of spring centering						2-position valve					
Flow(L/min)	Pressure stage(bar)					Flow(L/min)	Pressure stage(bar)				
Symbol	70	140	210	280	350	Symbol	70	140	210	280	350
E, J, L, M, R	1100	1040	860	750	680	C, D, K, Z, Y	1100	1040	860	750	680
U, W, R						Hydraulic-return 2-position valve					
H, G	1100	1000	680	500	450	HC, HD, HK, HZ, HY	1100	1040	860	750	680
F, T, P	820	630	510	450	400	When control oil is supplied internally and pressure valve is equipped, the flow of spool valve's enginery of C, G, T, F, P, H, V and Z Types reaches 180L/min.					

Pilot-operated solenoid valve


Use a four-way directional control valve with size of 6 to be a pilot valve. Spool valve is kept at the middle position or initial position by a spring and working position by the solenoid or positioner.
This valve applies wet DC or AC solenoid. Enginery of pilot-operated solenoid valve applied for main valve with different engineries are as the table below:

Main valve	Pilot-operated solenoid valve
Spring-centering 3-position valve/ transformed 2-position valve	Use 4WE6J-6X/...3-position valve/ 4WE6JA... 4WE6JB...
Structure of 2-position main valve: Y.../...and HY.../... B.../...and HB.../...	Use 4WE6Y-6X/...2-position valve
2-position valve: A, C, D, K and Z Type functions HA, HC, HD, HK, HZ Type valves	Use 2-position valve with D Type enginery Types of main valve's structure: spring return 4WE6D6X/.. No returning spring 4WE6D-6X/O... No returning spring, with a positioner 4WE6D-6X/OF..

02

Unit dimensions

Unit dimensions of WEH 10 electro-hydraulic directional control valve

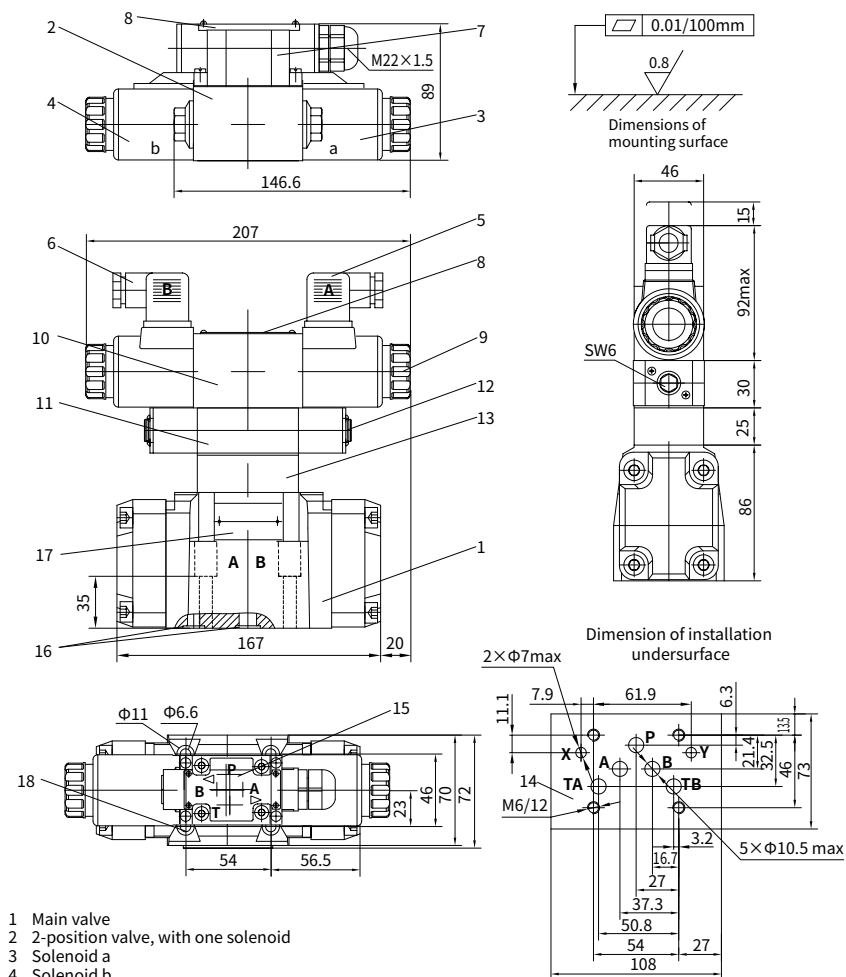

- 1 Main valve
- 2 2-position valve, with one solenoid
- 3 Solenoid a
- 4 Solenoid b
- 5 Plug of solenoid a
- 6 Plug of solenoid b
- 7 Junction box with lead and light, M22×1.5 interface
- 8 Label of pilot valve
- 9 Manual button
- 10 Double-solenoid 2-position valve, double-solenoid 3-position valve
- 11 Switching time regulator
- 12 Section flow of Switching time regulator "full open"
- 13 Reducing valve
- 14 Arrangement of main valve's oil outlets (attachment face of valve)
- 15 Position of leading oil outlet
- 16 O-ring of A, B, P and T outlets: 12×2;
O-ring of X and Y: 10.82×1.78

TA and TB can be selected to be an oil returning arbitrarily





- 17 Nameplate
- 18 Bolt4-M6×45 GB/T70.1-2000-10.9 grade
Moment $M_k=15.5\text{Nm}$ (bolt of vertical stack components combined with electro-hydraulic directional valve is selected according to actual height)

If you need connecting baseplate, must order separately.

Types: G534/01; G534/02; G535/01; G535/02;
G536/01; G536/02

Unit dimensions

Unit dimensions of WEH 16 electro-hydraulic directional control valve

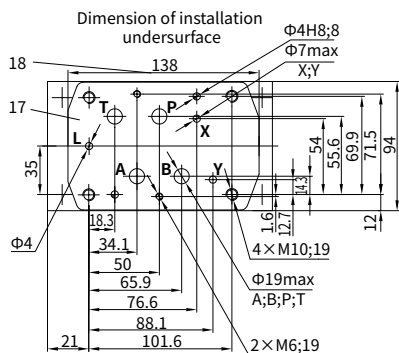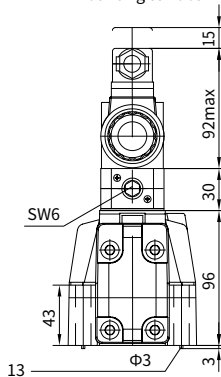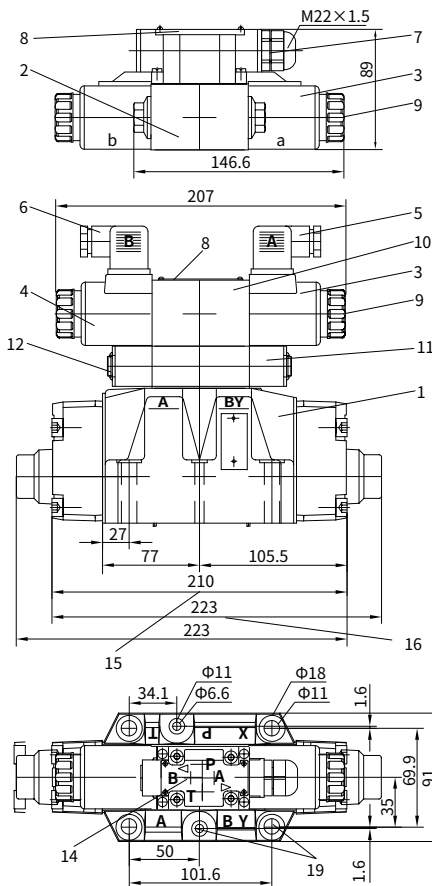

- 1 Main valve
- 2 2-position valve with one solenoid
- 3 Solenoid a
- 4 Solenoid b
- 5 Plug of solenoid a
- 6 Plug of solenoid a
- 7 Junction box with lead and light, M22×1.5 interface
- 8 Label of pilot valve
- 9 Manual button
- 10 Double-solenoid 2-position valve,
Double-solenoid 3-position valve
- 11 Switching time regulator
- 12 Adjustable bolt
- 13 2 locating pins
- 14 Locating diagram of connector of
pilot-operated solenoid valve
- 15 Size of spring-centering 3-position valve and
hydraulic-return 2-position valve


- 16 Spring-return 2-position valve
(icon sizes are C, D, K, Z engineries)
- 17 Connection diagram of main valve
- 18 Minimum size of process-required connection face of main valve
- 19 Bolt4-M10×60 GB/T70.1-2000-10.9 grade($M_n=75Nm$)
Bolt 2-M6×55 GB/T70.1-2000-10.9grade($M_n=15.5Nm$)
(bolt of vertical stack components combined with electro-hydraulic directional valve is selected according to actual height)
must order separately.
- O-ring for P, T, A, B outlets: 22×2.5; O-ring for X, Y, L outlets: 10×2

**If you need connecting baseplate,
must order separately.**

Types: G172/01; G172/02/02; G174/01; G174/02; G174/08

Unit dimensions

Unit dimensions of WEH 25 electro-hydraulic directional control valve

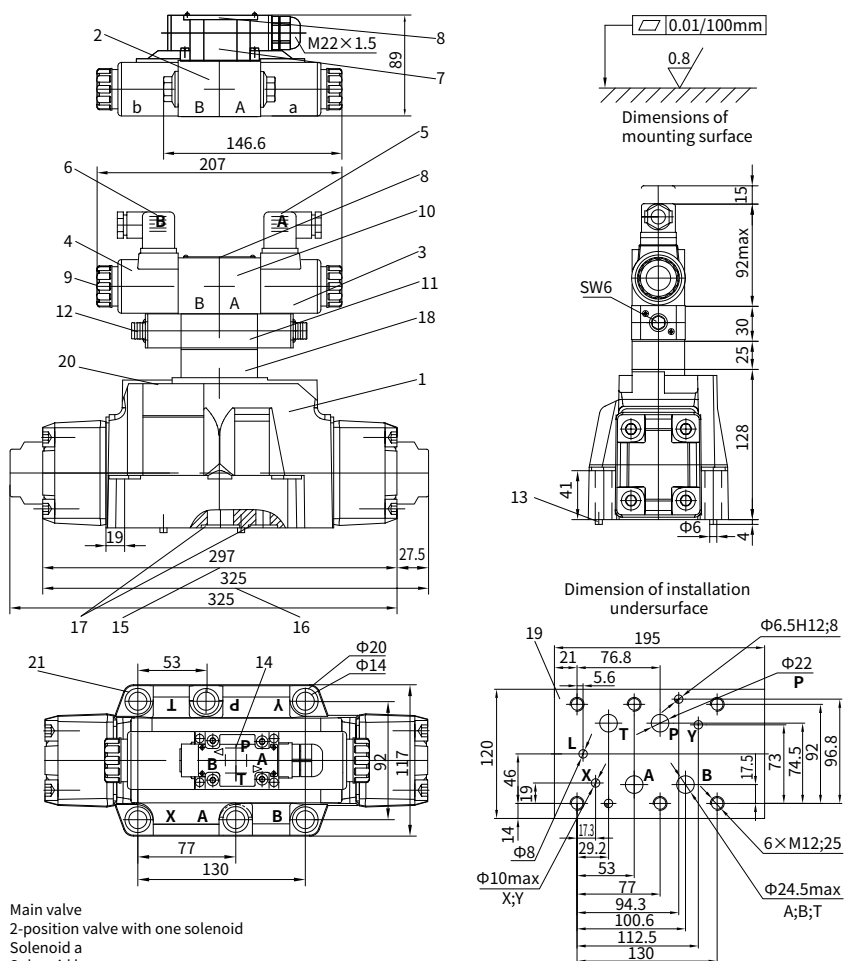

- 1 Main valve
- 2 2-position valve with one solenoid
- 3 Solenoid a
- 4 Solenoid b
- 5 Plug of solenoid a
- 6 Plug of solenoid b
- 7 Junction box with lead and light, M22×1.5 interface
- 8 Label of pilot valve
- 9 Manual button
- 10 Double-solenoid 2-position valve, Double-solenoid 3-position valve
- 11 Switching time regulator
- 12 Adjustable bolt
- 13 2 locating pins
- 14 Locating diagram of connector of pilot
- 15 Size of spring-centering 3-position valve and hydraulic-return 2-position valve
- 16 Spring-return 2-position valve (icon sizes are C, D, K, Z functions)

- 17 O-ring: 27×3(A, B, P and T); 19×3(X, Y)
- 18 Reducing valve
- 19 Diagram of connector of main valve
- 20 Labels
- 21 Bolt6-M12×60 GB/T70.1-2000-10.9 grade ($M_n=130\text{Nm}$) (bolt of vertical stack components combined with electro-hydraulic directional valve is selected according to actual height) must order separately.


If you need connecting baseplate, must order separately.

Types:

G151/01; G151/02; G153/01; G153/02;
G154/01; G154/02; G156/01; G156/02; G154/08

Unit dimensions

Unit dimensions of WEH 32 electro-hydraulic directional control valve

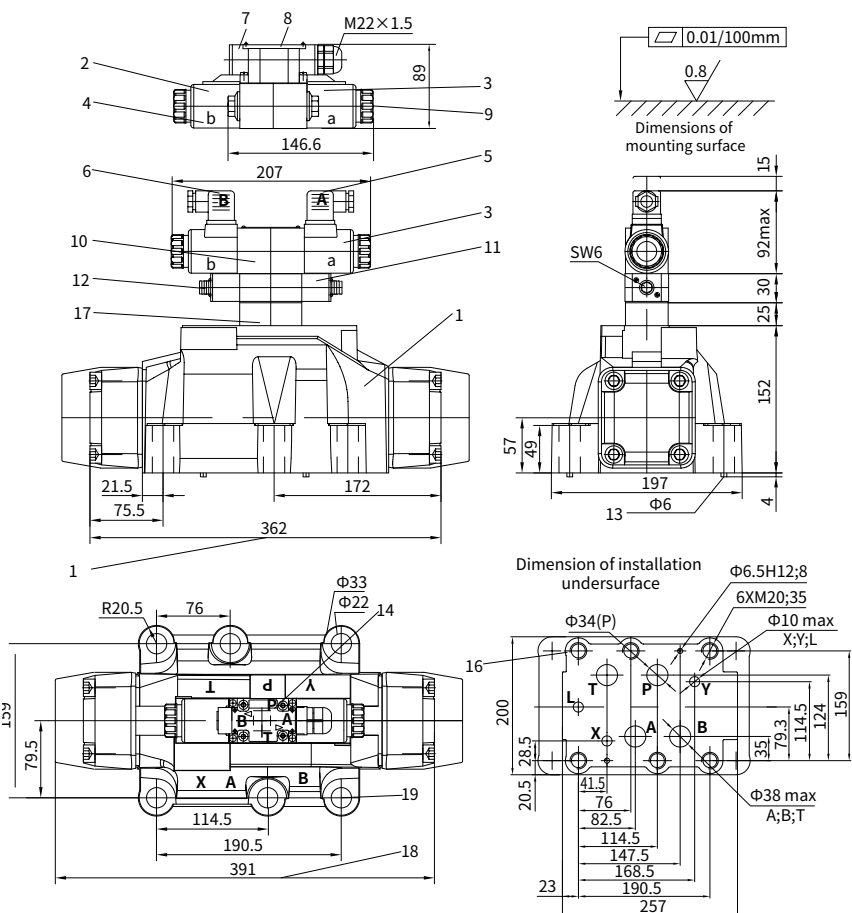

- 1 Main valve
- 2 2-position valve with one solenoid
- 3 Solenoid a
- 4 Solenoid b
- 5 Plug of solenoid a
- 6 Plug of solenoid a
- 7 Junction box with lead and light, M22×1.5 interface
- 8 Label of pilot valve
- 9 Manual button
- 10 Double-solenoid 2-position valve, Double-solenoid 3-position valve
- 11 Switching time regulator
- 12 The location when section flow full open
- 13 2 locating pins
- 14 Locating diagram of connector of pilot-operated solenoid valve
- 15 Size of spring-centering 3-position valve and hydraulic-return 2-position valve

- 16 Locating diagram of connector of main valve
- 17 Reducing valve
- 18 Spring-return 2-position valve
(Icon size is Y Type enginery.
For C, D, K, Z on the right head protruding function)
- 19 Bolt-M20×80 GB/T70.1-2000-10.9 (M_s=430Nm)
(bolt of vertical stack components combined with electro-hydraulic directional valve is selected according to actual height)
P, T, A, B port O-rings: 42×3
X, Y, L port O-rings: 19×3

If you need connecting baseplate, must order separately.
Types: G157/01; G157/02; G158/10

China +86 400 101 8889	America +01 630 995 3674
Germany +49 172 3683463	Japan +81 03 6809 1696



© This brochure can be reproduced, edited, reproduced or transmitted electronically without the authorization of Hengli Hydraulic Company. Due to the continuous development of the product, the information in this brochure is not specific to the specific conditions or applicability of the industry, thus, Hengli does not take any responsibility for any incomplete or inaccurate description.